

# HY11131A (AZMF-12-008UXR12KX-S)

## TECH SHEET

### Displacement:

U.S. Gallons/Rev.	0.0029
Cubic Inches/Rev.	0.671
Liters/Rev.	0.011

### Pressure rating:

Max Hydraulic Pressure 3000 psi

### Banjo M350 Pump Operation:

Max Speed	3600 rpm
Max Hydraulic Flow	11 gpm
Typical Hydraulic Pressure	2000-2600 psi

### Port Sizes:

Inlet Port	SAE 10 (7/8-14UNF-2B)
Outlet Port	SAE 10 (7/8-14UNF-2B)
Case Drain Port	SAE 04 (7/16-20UNF-2B)


### Connection Information:

"A" Port – To Tank (Outlet)

"B" Port – Pressure (Inlet)

### Case Drain Port – To Tank (Outlet)

- Because this is a bi-directional motor, reversing "A" and "B" ports will not damage the motor. No check valve is required.
- Case drain must not be restricted. Back-pressure above 4.3 psi may damage motor seals.

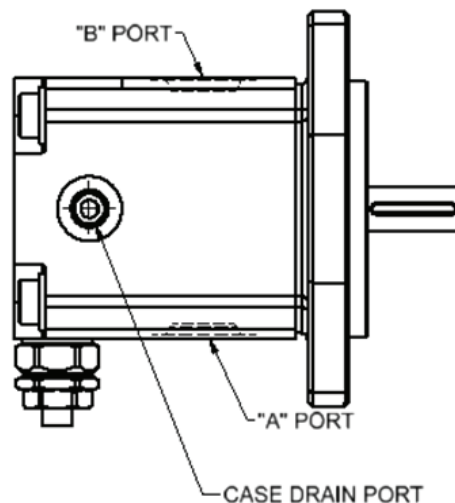

**BANJO CORPORATION** | A Unit of IDEX Corporation  
150 Banjo Drive, Crawfordsville, IN 47933 U.S.A.  
banjocorp.com | Telephone: (765) 362-7367