

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	EP31D82634	EVX ACT 8S REGULATING 6W LINEAR FEEDBACK4-20MA
2	1	EVP20001	EV U-PIN
3	1	MEVX203X	MEVX 2" SP V-BALL BOLTED VALVE

WIRING:

LOW CURRENT SIGNAL WIRES:

RED = +12VDC (CCW)
 BLACK = +12VDC (CW)

HIGH CURRENT MOTOR DRIVE:


WHITE = GND
 ORANGE = +12VDC

FEEDBACK:

GREEN = 4-20mA (-) FEEDBACK
 BLUE = 4-20mA (+) FEEDBACK

NOTE: IF POWER SUPPLIED TO RED/BLACK SIMULTANEOUSLY, NO ROTATION WILL OCCUR.

WIRE LENGTH: 18" ± 1"

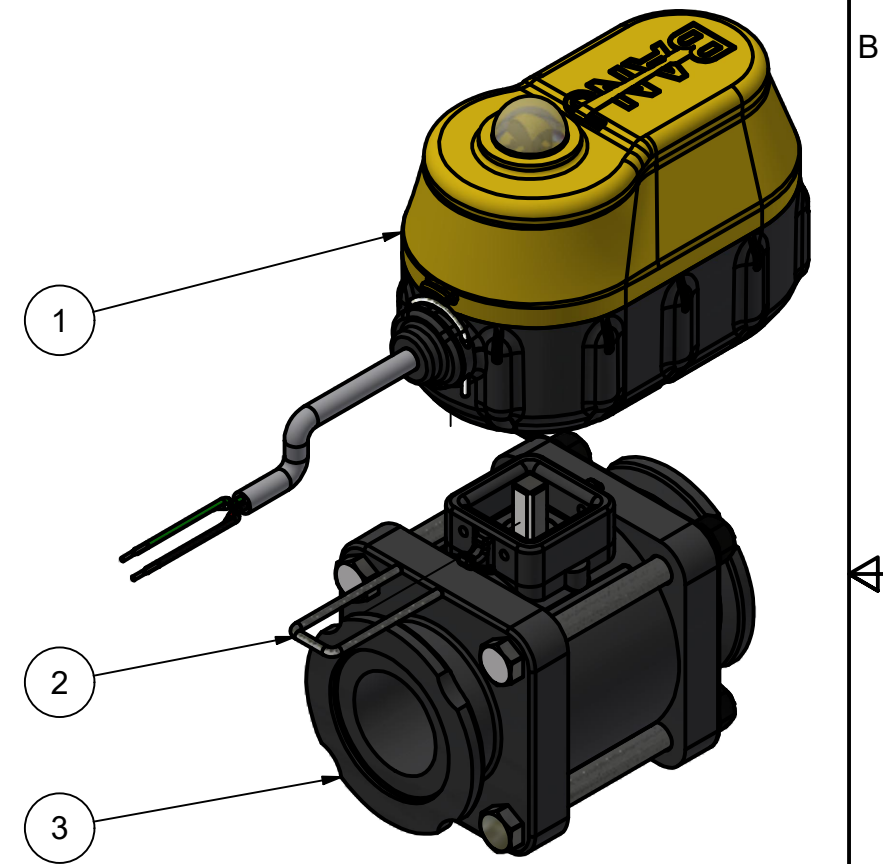

THIS DRAWING AND ALL INFORMATION CONTAINED THEREON ARE THE EXCLUSIVE PROPERTY OF BANJO CORPORATION.

UNLESS SPECIFICALLY NOTED, THIS DRAWING AND ITEMS SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE AT ANY TIME.



BANJO CORPORATION
 A UNIT OF IDEX CORPORATION
 150 BANJO DRIVE, CRAWFORDSVILLE, IN 47933
 WEB SITE: WWW.BANJOCORP.COM
 E-MAIL: BANJOSALES@IDEXCORP.COM

DESCRIPTION:
MEVX 2" 8S 2W REG 6W 4-20MA V-BALL
 PART NUMBER:
MEVXR2W201F4A